



KONICA MINOLTA

# bizhub C754e

✍ Colour A3 multifunctional

✍ Up to 60/75 ppm in colour/black & white

## ✍ Functionality



- Colour
- Black & white

Copying



- Colour
- Black & white
- PCL/PS
- Local/Network
- USB

Printing



- Colour
- Black & white
- Scan-to-eMail
- Scan-to-Me
- Scan-to-SMB
- Scan-to-Home
- Scan-to-FTP
- Scan-to-Box
- Scan-to-USB
- Scan-to-WebDAV
- Scan-to-DPWS
- TWAIN Network

Scanning



- Super G3 Fax
- PC-Fax
- i-Fax
- IP-Fax

Faxing



- Reprint
- Distribution
- Sharing
- Box-to-Box
- Box-to-USB

Box




Giving Shape to Ideas


## Technology

|                                 |                                                                                                  |   |
|---------------------------------|--------------------------------------------------------------------------------------------------|---|
| Emperon™ – print controller     | Easily compatible to users and IT environments thanks to Konica Minolta unified print technology | ✓ |
| Simitri® HD – polymerised toner | Reduces your budget while delivering high quality and low environmental impact                   | ✓ |
| OpenAPI – solution platform     | Enable efficient workflows throughout your MFP fleet by server-based applications                | ✓ |
| i-Option – special feature      | Increase the scope of MFP functionality from basic to advanced depending on your needs           | ✓ |
| CSRC – remote service           | Keep productivity up by online device and consumable monitoring by the Konica Minolta service    | ✓ |
| IWS – panel customisation       | Improved user-device interaction and productivity by full MFP panel customisation to your needs  | ✓ |

## Option diagram

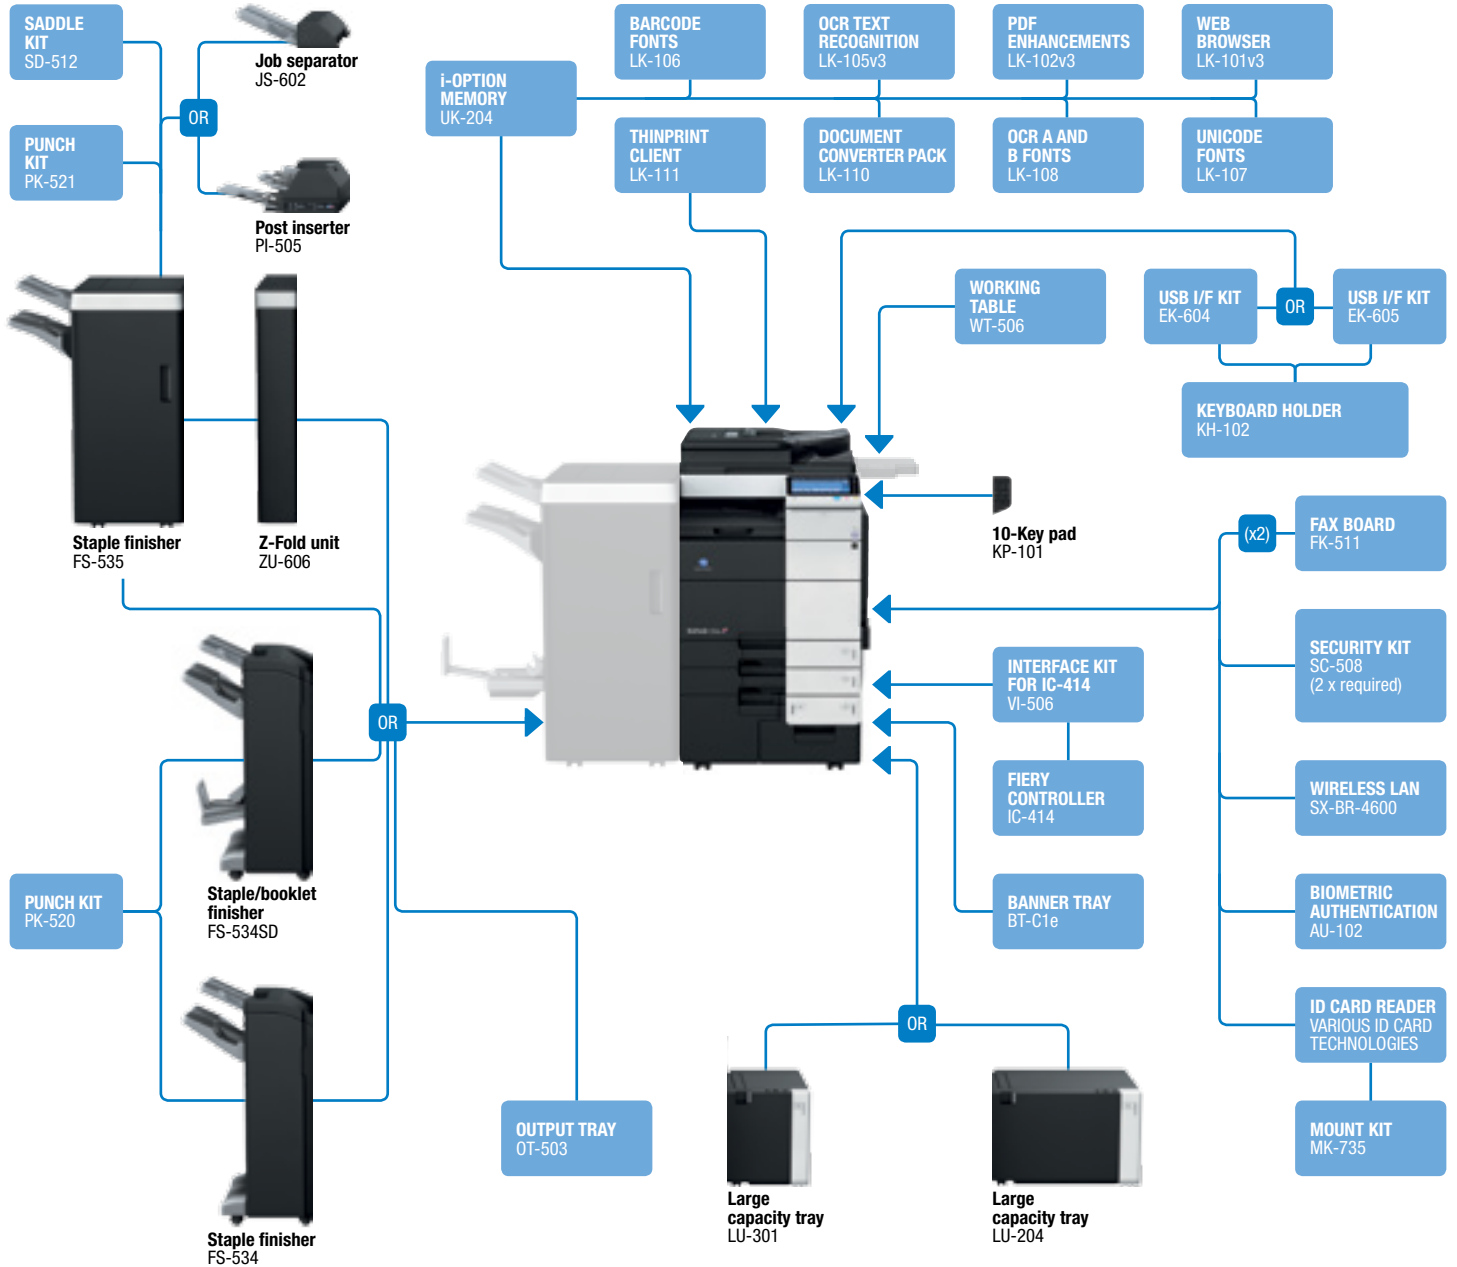

## Finishing options



## Descriptions

|                                        |                                                                                                                                                                                                                                                                                                                                                              |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>bizhub C754e</b>                    | Communication centre with 75 ppm b/w and 60 ppm colour. Standard Emperon™ print controller with PCL 5c; PCL 6, PostScript 3, PDF 1.7, OOXML and XPS support. Paper capacity of 500 + 500 + 1000 + 1500 sheets and 150-sheet manual bypass. Media from A6 to SRA3, 1.2 m banner and 52 – 300 gsm. 2 GB memory, 250 GB hard disk and Gigabit Ethernet standard |
| <b>LU-204 Large capacity tray</b>      | A4–SRA3, 2,500 sheets, 52–256 gsm                                                                                                                                                                                                                                                                                                                            |
| <b>LU-301 Large capacity tray</b>      | A4, 3,000 sheets, 52–256 gsm                                                                                                                                                                                                                                                                                                                                 |
| <b>FS-534 Staple finisher</b>          | 50-sheet stapling, 3,200 sheets max. output                                                                                                                                                                                                                                                                                                                  |
| <b>FS-534SD Booklet finisher</b>       | 50-sheets staple finisher, 20-sheets booklet finisher, 2,200 sheets max. output                                                                                                                                                                                                                                                                              |
| <b>PK-520 Punch kit for FS-534/SD</b>  | 2/4 hole punching, autoswitching                                                                                                                                                                                                                                                                                                                             |
| <b>FS-535 Staple finisher</b>          | 100 sheets stapling, 3,200 sheets max. output                                                                                                                                                                                                                                                                                                                |
| <b>PK-521 Punch kit for FS-535</b>     | 2/4 hole punching, autoswitching                                                                                                                                                                                                                                                                                                                             |
| <b>SD-512 Saddle kit for FS-535</b>    | Booklet finishing, half-fold, letter-fold                                                                                                                                                                                                                                                                                                                    |
| <b>PI-505 Post inserter for FS-535</b> | Cover insertion, post finishing                                                                                                                                                                                                                                                                                                                              |
| <b>JS-602 Job separator for FS-535</b> | Separation for fax output etc.                                                                                                                                                                                                                                                                                                                               |
| <b>ZU-606 Z-fold unit for FS-535</b>   | Z-fold for A3 prints, 2/4 hole punching                                                                                                                                                                                                                                                                                                                      |
| <b>OT-503 Output tray</b>              | Output tray used instead of finisher                                                                                                                                                                                                                                                                                                                         |
| <b>KP-101 10-Key pad</b>               | For use instead of touchscreen                                                                                                                                                                                                                                                                                                                               |

## Technical specifications

### SYSTEM SPECIFICATIONS

|                                              |                                                                                               |
|----------------------------------------------|-----------------------------------------------------------------------------------------------|
| <b>System memory</b>                         | 2,048 MB                                                                                      |
| <b>System hard disk</b>                      | 250 GB                                                                                        |
| <b>Interface</b>                             | 10-Base-T/100-Base-T/1,000-Base-T Ethernet; USB 2.0                                           |
| <b>Network protocols</b>                     | TCP/IP (IPv4 / IPv6); IPX/SPX; NetBEUI; AppleTalk (EtherTalk); SMB; LPD; IPP; SNMP; HTTP      |
| <b>Frame types</b>                           | Ethernet 802.2; Ethernet 802.3; Ethernet II; Ethernet SNAP                                    |
| <b>Automatic document feeder</b>             | Up to 150 originals; A6–A3; 35–210 gsm<br>Dualscan ADF                                        |
| <b>Printable paper size</b>                  | A6–SRA3, customised paper sizes;<br>banner paper max. 1,200 x 297 mm                          |
| <b>Printable paper weight</b>                | 52–300 gsm                                                                                    |
| <b>Paper input capacity</b>                  | Standard: 3,650 sheets<br>Max.: 6,650 sheets                                                  |
| <b>Tray 1</b>                                | 500 sheets, A5–SRA3, 52–256 gsm                                                               |
| <b>Tray 2</b>                                | 500 sheets, A5–SRA3, 52–256 gsm                                                               |
| <b>Tray 3</b>                                | 1,500 sheets, A4, 52–256 gsm                                                                  |
| <b>Tray 4</b>                                | 1,000 sheets, A4, 52–256 gsm                                                                  |
| <b>Large capacity tray LU-301 (optional)</b> | 3,000 sheets, A4, 52-256 gsm                                                                  |
| <b>Large capacity tray LU-204 (optional)</b> | 2,500 sheets, A4-SRA3, 52-256 gsm                                                             |
| <b>Manual bypass</b>                         | 150 sheets, A6-SRA3, custom sizes, banner, 52–300 gsm                                         |
| <b>Automatic duplexing</b>                   | A5–SRA3; 52–256 gsm                                                                           |
| <b>Finishing modes (optional)</b>            | Offset; group; sort; staple; punch; post insertion; z-fold; centre-fold; letter fold; booklet |
| <b>Output capacity (with finisher)</b>       | Max.: 3,300 sheets                                                                            |
| <b>Output capacity (without finisher)</b>    | Max.: 250 sheets                                                                              |
| <b>Stapling</b>                              | Max.: 100 sheets or 94 sheets + 2 cover sheets<br>(up to 209 gsm)                             |
| <b>Stapling output capacity</b>              | Max.: 1,000 sheets                                                                            |
| <b>Letter fold</b>                           | Up to 3 sheets                                                                                |
| <b>Letter fold capacity</b>                  | Max.: 30 sheets (tray); unlimited                                                             |
| <b>Booklet</b>                               | Max.: 20 sheets or 19 sheets + 1 cover sheet<br>(up to 209 gsm)                               |
| <b>Booklet output capacity</b>               | Max.: 100 sheets (tray); unlimited                                                            |
| <b>Copy/print volume (monthly)</b>           | Rec.: 80,000 pages<br>Max. <sup>1</sup> : 275,000 pages                                       |
| <b>Toner lifetime</b>                        | Black 47,200 pages; CMY 31,500 pages                                                          |
| <b>Imaging unit lifetime</b>                 | Black 300,000 pages/1,200,000 pages (Drum/Developer)<br>CMY 155,000 pages                     |
| <b>Power consumption</b>                     | 220–240 V / 50/60 Hz<br>Less than 2,1 kW (system)                                             |
| <b>System dimensions (W x D x H)</b>         | 650 x 799 x 1,155 mm                                                                          |
| <b>System weight</b>                         | Approx. 221 kg                                                                                |

|                                        |                                                           |
|----------------------------------------|-----------------------------------------------------------|
| <b>WT-506 Working table</b>            | Authentication device placement                           |
| <b>FK-511 Fax board</b>                | Super G3 fax, digital fax functionality                   |
| <b>IC-414 Fiery controller</b>         | Professional colour print controller                      |
| <b>VI-506 Interface kit for IC-414</b> | Fiery controller interface card                           |
| <b>KH-102 Keyboard holder</b>          | To place USB keyboard                                     |
| <b>EK-604 USB I/F kit</b>              | USB keyboard connection                                   |
| <b>EK-605 USB I/F kit</b>              | USB keyboard connection, Bluetooth                        |
| <b>ID card reader</b>                  | Various ID card technologies                              |
| <b>MK-735 Mount kit</b>                | Installation kit for ID card reader                       |
| <b>AU-102 Biometric authentication</b> | Finger vein scanner                                       |
| <b>SC-508 Security kit</b>             | Copy Guard function                                       |
| <b>BT-C1e Banner tray</b>              | Multi-page banner feeding                                 |
| <b>LK-101 Web browser</b>              | Web browser                                               |
| <b>LK-102 PDF enhancements</b>         | PDF/A, PDF encryption, digital signature                  |
| <b>LK-105 OCR text recognition</b>     | Searchable PDF and PPTX                                   |
| <b>LK-106 Barcode fonts</b>            | Supports native barcode printing                          |
| <b>LK-107 Unicode fonts</b>            | Supports native Unicode printing                          |
| <b>LK-108 OCR A and B fonts</b>        | Supports native OCR A and B font printing                 |
| <b>LK-110 Document converter pack</b>  | Generates various file formats incl. DOCX, XLSX and PDF/A |
| <b>LK-111 ThinPrint® Client</b>        | Print data compression for reduced network impact         |
| <b>UK-204 i-Option memory</b>          | Memory extension for i-Options                            |
| <b>SX-BR-4600 Wireless Lan</b>         | Wireless LAN to network connector                         |

### COPIER SPECIFICATIONS

|                                          |                                                                                                                                                                                                              |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Copying process</b>                   | Electrostatic laser copy, tandem, indirect                                                                                                                                                                   |
| <b>Toner system</b>                      | Simitri® HD polymerised toner                                                                                                                                                                                |
| <b>Copy/print speed A4 (mono/colour)</b> | Up to 75 ppm<br>Up to 60 ppm                                                                                                                                                                                 |
| <b>Copy/print speed A3 (mono/colour)</b> | Up to 37 ppm<br>Up to 30 ppm                                                                                                                                                                                 |
| <b>Autoduplex speed A4 (mono/colour)</b> | Up to 75 ppm<br>Up to 60 ppm                                                                                                                                                                                 |
| <b>1st copy out time (mono/colour)</b>   | 3.6 sec.<br>5.3 sec.                                                                                                                                                                                         |
| <b>Warm-up time</b>                      | Approx. 22 sec. <sup>2</sup>                                                                                                                                                                                 |
| <b>Copy resolution</b>                   | 600 x 600 dpi                                                                                                                                                                                                |
| <b>Gradation</b>                         | 256 gradations                                                                                                                                                                                               |
| <b>Multicopy</b>                         | 1 – 9,999                                                                                                                                                                                                    |
| <b>Original format</b>                   | A5–A3                                                                                                                                                                                                        |
| <b>Magnification</b>                     | 25–400% in 0.1% steps; auto-zooming                                                                                                                                                                          |
| <b>Copy functions</b>                    | Chapter; cover and page insertion; proof copy (print and screen); adjustment test print; digital art functions; job setting memory; poster mode; image repeat; overlay (optional); stamping; copy protection |

### PRINTER SPECIFICATIONS

|                                  |                                                                                                                                                                                                                                                              |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Print resolution</b>          | 1,800 x 600 dpi; 1,200 x 1,200 dpi                                                                                                                                                                                                                           |
| <b>Page description language</b> | PCL6 (XL 3.0); PCL 5c; PostScript 3 (CPSI 3016); XPS                                                                                                                                                                                                         |
| <b>Operating systems</b>         | Windows XP (32/64)<br>Windows VISTA (32/64)<br>Windows 7 (32/64)<br>Windows 8 (32/64)<br>Windows Server 2003 (32/64)<br>Windows Server 2008 (32/64)<br>Windows Server 2008 R2 (64)<br>Windows Server 2012 (64)<br>Macintosh OS X 10.x<br>Unix, Linux, Citrix |
| <b>Printer fonts</b>             | 80 PCL Latin; 137 PostScript 3 Emulation Latin                                                                                                                                                                                                               |
| <b>Print functions</b>           | Direct print of PCL, PS, TIFF, XPS, PDF, encrypted PDF files and OOXML (DOCX, XLSX, PPTX); mixmedia and mixplex; “Easy Set” job programming; overlay; watermark; copy protection; carbon copy print                                                          |

<sup>1</sup> If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed

<sup>2</sup> Warm-up time may vary depending on the operating environment and usage

